



**General Characteristics 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**

Typical specifications: Furnish and install Electric Forced Air Heaters Wall Mount Recessed.  
 Powder coated 18 gauge steel front.  
 Automatic reset thermal limit.  
 Vane axial fan blade: 600 RPM / 175 CFM.  
 Rough in dimensions: 14 1/8" Wide x 19 1/2" High x 4" Deep.  
 Grill dimensions: 16 3/16" Wide x 21" High.  
 Steel block fin element.  
 Weight 22 lbs.  
 Units with dual wattage, factory wired to highest wattage.  
 Wattage Without Summer Fan Switch selectable at time of installation on some models.  
 Made in U.S.A.  
 Models with in-built double pole thermostat (0° - 110° f temperature range).  
 Models with in-built single pole thermostat (0° - 110° f temperature range).  
 Models without an in-built thermostat.

**Product Applications 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**

Recommended for all industrial, commercial, and residential. For indoor and outdoor use.

**Warranties 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**

Manufacturer's Limited Warranty: 1 Year.



Specific Characteristics 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch											
Item #	CFM	Volts	Amps	Watts	RPM	BTU's	Thermostat Type	Temp Rise (°F)	Color	Weight and Dimensions With Packaging (CM)	
										Lbs	W, H, D
<b>USUSH-001</b>	175	120	8.3	1000	600	3413	Double Pole	0° - 110°	Ivory	22	36, 50, 11
<b>USUSH-002</b>	175	120	8.3	1000	600	3413	Double Pole	0° - 110°	White	22	36, 50, 11
<b>USUSH-003</b>	175	120	12.5	1500	600	5120	Double Pole	0° - 110°	Ivory	22	36, 50, 11
<b>USUSH-004</b>	175	120	6.25	750	600	2560	Double Pole	0° - 110°	Ivory	22	36, 50, 11



Specific Characteristics 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch											
Item #	CFM	Volts	Amps	Watts	RPM	BTU's	Thermostat Type	Temp Rise (°F)	Color	Weight and Dimensions With Packaging (CM)	
										Lbs	W, H, D
USUSH-005	175	120	12.5	1500	600	5120	Double Pole	0° - 110°	White	22	36,50,11
USUSH-006	175	120	6.25	750	600	2560	Double Pole	0° - 110°	White	22	36,50,11
USUSH-007	175	208	19.2	4000	600	13648	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-008	175	208	19.2	4000	600	13648	Double Pole	0° - 110°	White	22	36,50,11
USUSH-009	175	208	23	4800	600	16380	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-010	175	208	23	4800	600	16380	Double Pole	0° - 110°	White	22	36,50,11
USUSH-011	175	240/208	12.5/10.8	3000/2250	600	10240	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-012	175	240/208	6.2/5.4	1500/1125	600	5120	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-013	175	240/208	12.5/10.8	3000/2250	600	10240	Double Pole	0° - 110°	White	22	36,50,11
USUSH-014	175	240/208	6.2/5.4	1500/1125	600	5120	Double Pole	0° - 110°	White	22	36,50,11
USUSH-015	175	240/208	16.8/14.4	4000/3000	600	13648	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-016	175	240/208	8.3/7.2	2000/1500	600	6826	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-017	175	240/208	16.8/14.4	4000/3000	600	13648	Double Pole	0° - 110°	White	22	36,50,11
USUSH-018	175	240/208	8.3/7.2	2000/1500	600	6826	Double Pole	0° - 110°	White	22	36,50,11
USUSH-019	175	240	20.0	4800	600	16380	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-020	175	240	20.0	4800	600	16380	Double Pole	0° - 110°	White	22	36,50,11
USUSH-021	175	277	7.2	2000	600	6826	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-022	175	277	7.2	2000	600	6826	Double Pole	0° - 110°	White	22	36,50,11
USUSH-023	175	277	10.8	3000	600	10240	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-024	175	277	10.8	3000	600	10240	Double Pole	0° - 110°	White	22	36,50,11
USUSH-025	175	277	14.4	4000	600	13648	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-026	175	277	14.4	4000	600	13648	Double Pole	0° - 110°	White	22	36,50,11
USUSH-027	175	277	17.3	4800	600	16380	Double Pole	0° - 110°	Ivory	22	36,50,11
USUSH-028	175	277	17.3	4800	600	16380	Double Pole	0° - 110°	White	22	36,50,11
USUSH-029	175	120	8.3	1000	600	3413	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-030	175	120	8.3	1000	600	3413	Single Pole	0° - 110°	White	22	36,50,11
USUSH-031	175	120	12.5	1500	600	5120	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-032	175	120	6.25	750	600	2560	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-033	175	120	12.5	1500	600	5120	Single Pole	0° - 110°	White	22	36,50,11
USUSH-034	175	120	6.25	750	600	2560	Single Pole	0° - 110°	White	22	36,50,11
USUSH-035	175	208	19.2	4000	600	13648	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-036	175	208	19.2	4000	600	13648	Single Pole	0° - 110°	White	22	36,50,11
USUSH-037	175	208	23	4800	600	16380	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-038	175	208	23	4800	600	16380	Single Pole	0° - 110°	White	22	36,50,11
USUSH-039	175	240/208	12.5/10.8	3000/2250	600	10240	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-040	175	240/208	6.2/5.4	1500/1125	600	5120	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-041	175	240/208	12.5/10.8	3000/2250	600	10240	Single Pole	0° - 110°	White	22	36,50,11
USUSH-042	175	240/208	6.2/5.4	1500/1125	600	5120	Single Pole	0° - 110°	White	22	36,50,11
USUSH-043	175	240/208	16.8/14.4	4000/3000	600	13648	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-044	175	240/208	8.3/7.2	2000/1500	600	6826	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-045	175	240/208	16.8/14.4	4000/3000	600	13648	Single Pole	0° - 110°	White	22	36,50,11
USUSH-046	175	240/208	8.3/7.2	2000/1500	600	6826	Single Pole	0° - 110°	White	22	36,50,11
USUSH-047	175	240	20.0	4800	600	16380	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-048	175	240	20.0	4800	600	16380	Single Pole	0° - 110°	White	22	36,50,11
USUSH-049	175	277	7.2	2000	600	6826	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-050	175	277	7.2	2000	600	6826	Single Pole	0° - 110°	White	22	36,50,11
USUSH-051	175	277	10.8	3000	600	10240	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-052	175	277	10.8	3000	600	10240	Single Pole	0° - 110°	White	22	36,50,11
USUSH-053	175	277	14.4	4000	600	13648	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-054	175	277	14.4	4000	600	13648	Single Pole	0° - 110°	White	22	36,50,11
USUSH-055	175	277	17.3	4800	600	16380	Single Pole	0° - 110°	Ivory	22	36,50,11
USUSH-056	175	277	17.3	4800	600	16380	Single Pole	0° - 110°	White	22	36,50,11
USUSH-057	175	120	8.3	1000	600	3413	Without	-	Ivory	22	36,50,11
USUSH-058	175	120	8.3	1000	600	3413	Without	-	White	22	36,50,11
USUSH-059	175	120	12.5	1500	600	5120	Without	-	Ivory	22	36,50,11
USUSH-060	175	120	6.25	750	600	2560	Without	-	Ivory	22	36,50,11



**3310 Series Fan Forced  
 Wall Heater  
 Data Sheet**


**Specific Characteristics 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**

Item #	CFM	Volts	Amps	Watts	RPM	BTU's	Thermostat Type	Temp Rise (°F)	Color	Weight and Dimensions With Packaging (CM)	
										Lbs	W, H, D
USUSH-061	175	120	12.5	1500	600	5120	Without	-	White	22	36,50,11
USUSH-062	175	120	6.25	750	600	2560	Without	-	White	22	36,50,11
USUSH-063	175	208	19.2	4000	600	13648	Without	-	Ivory	22	36,50,11
USUSH-064	175	208	19.2	4000	600	13648	Without	-	White	22	36,50,11
USUSH-065	175	208	23	4800	600	16380	Without	-	Ivory	22	36,50,11
USUSH-066	175	208	23	4800	600	16380	Without	-	White	22	36,50,11
USUSH-067	175	240/208	12.5/10.8	3000/2250	600	10240	Without	-	Ivory	22	36,50,11
USUSH-068	175	240/208	6.2/5.4	1500/1125	600	5120	Without	-	Ivory	22	36,50,11
USUSH-069	175	240/208	12.5/10.8	3000/2250	600	10240	Without	-	White	22	36,50,11
USUSH-070	175	240/208	6.2/5.4	1500/1125	600	5120	Without	-	White	22	36,50,11
USUSH-071	175	240/208	16.8/14.4	4000/3000	600	13648	Without	-	Ivory	22	36,50,11
USUSH-072	175	240/208	8.3/7.2	2000/1500	600	6826	Without	-	Ivory	22	36,50,11
USUSH-073	175	240/208	16.8/14.4	4000/3000	600	13648	Without	-	White	22	36,50,11
USUSH-074	175	240/208	8.3/7.2	2000/1500	600	6826	Without	-	White	22	36,50,11
USUSH-075	175	240	20.0	4800	600	16380	Without	-	Ivory	22	36,50,11
USUSH-076	175	240	20.0	4800	600	16380	Without	-	White	22	36,50,11
USUSH-077	175	277	7.2	2000	600	6826	Without	-	Ivory	22	36,50,11
USUSH-078	175	277	7.2	2000	600	6826	Without	-	White	22	36,50,11
USUSH-079	175	277	10.8	3000	600	10240	Without	-	Ivory	22	36,50,11
USUSH-080	175	277	10.8	3000	600	10240	Without	-	White	22	36,50,11
USUSH-081	175	277	14.4	4000	600	13648	Without	-	Ivory	22	36,50,11
USUSH-082	175	277	14.4	4000	600	13648	Without	-	White	22	36,50,11
USUSH-083	175	277	17.3	4800	600	16380	Without	-	Ivory	22	36,50,11
USUSH-084	175	277	17.3	4800	600	16380	Without	-	White	22	36,50,11



**Dimensions (in) 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**

Item #	Wide	High	Deep
	A	B	C
<b>USUSH-001 a USUSH-028</b>	14 1/8"	19 1/2"	4"

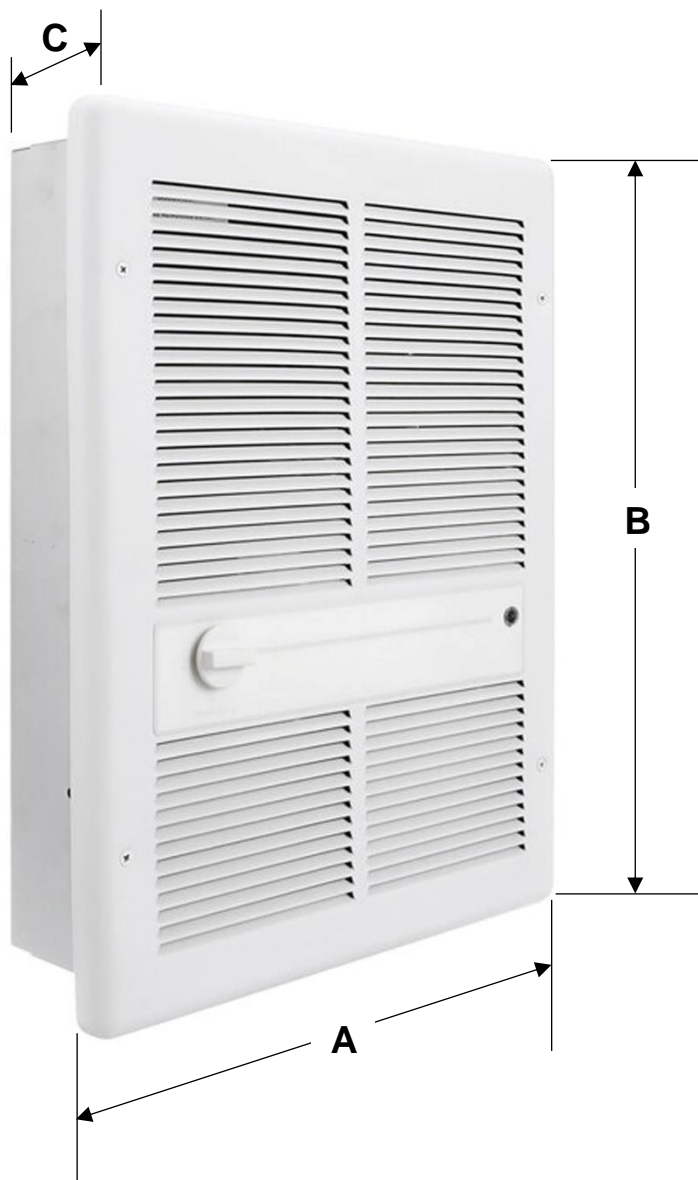



**Gallery, 3310 Series Fan Forced Wall Heater - Without Summer Fan Switch**



ID	Author	Description Error	Description Update	Supervisor Name
V1	Angelica Romero	New Data Sheet	New Data Sheet	Jessica Lorenzo