



5700 Series Confined Space Plenum Rated Heater

Data Sheet

General Characteristics 5700 Series Confined Space Plenum Rated Heater

Easily fits between joists for typical installation.
 Zero clearance for wall and ceiling mounting as well as floor mounting with appropriate inlet and outlet clearances.
 Bracket standard or can be mounted by 3/8" threaded rod (field supplied).
 Automatic reset thermal limit for safety.
 1 Phase model wattage field changeable from 1874 to 5000 Watts.
 24V control circuit on three phase models with hydraulic thermostat.
 Made in U.S.A

Product Applications 5700 Series Confined Space Plenum Rated Heater

Recommended for all industrial, commercial, and residential. For indoor and outdoor use.

Warranties 5700 Series Confined Space Plenum Rated Heater

Manufacturer's Limited Warranty: 1 Year.



Specific Characteristics 5700 Series Confined Space Plenum Rated Heater, Bracket and Thermostat

| Item # | Watts | BTU's | Volts | PH | Amps | Temp Rise (°F) | Temp Range | CFM | Weight and Dimensions with Packaging (CM) | | |
|-----------|---|-------|-------|----|------|----------------|----------------|-----|---|----------|----------|
| | | | | | | | | | Lbs | W, H, D | |
| USSCH-001 | 5000 | 17065 | 240 | 1 | 21 | 57 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-002 | 4165 | 14215 | 240 | 1 | 17 | 48 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-003 | 3332 | 11365 | 240 | 1 | 14 | 38 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-004 | 2500 | 8533 | 240 | 1 | 10 | 29 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-005 | 3750 | 12798 | 208 | 1 | 18 | 43 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-006 | 3123 | 10659 | 208 | 1 | 15 | 36 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-007 | 2500 | 8553 | 208 | 1 | 12 | 29 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-008 | 1874 | 6396 | 208 | 1 | 9 | 21 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-009 | 3750 | 12799 | 208 | 3 | 10.4 | 43 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-010 | 5000 | 17065 | 240 | 3 | 12 | 57 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-011 | 5000 | 17065 | 480 | 3 | 6 | 57 | (40 °F-120 °F) | 275 | 32 | 15,16,10 | |
| USSCH-012 | Optional Field Installed Disconnect Switch, 30 Amp @ 600Volts | | | | | | | | | 32 | 15,16,10 |




**5700 Series Confined Space
 Plenum Rated Heater**

Data Sheet

Dimensions (in) 5700 Series Confined Space Plenum Rated Heater

| Item # | A | B | C | D | E | F |
|-----------------------|------|------|------|-----|-----|-----|
| USSCH-001 a USSCH-012 | 14.4 | 19.4 | 14.5 | 8.4 | 5.1 | 9.2 |

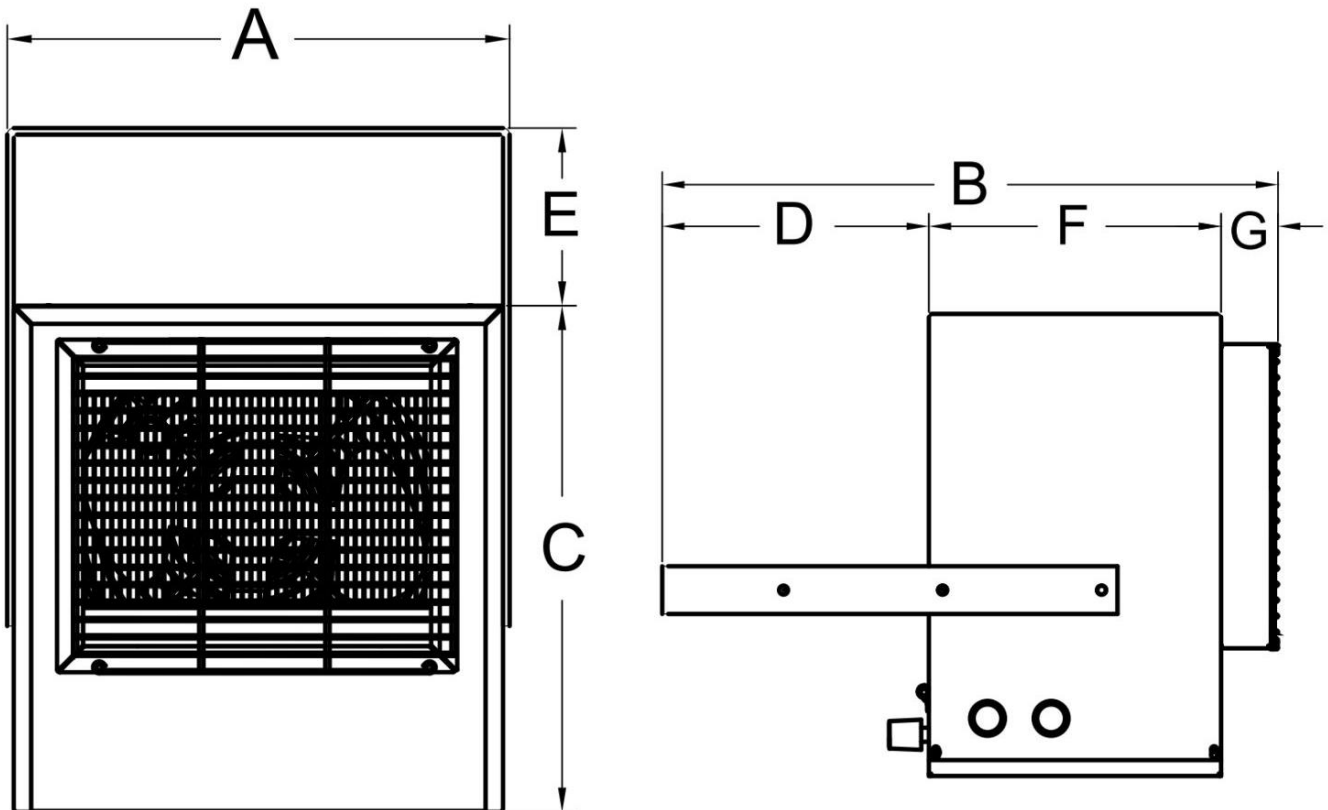

| ID | Author | Description Error | Description Update | Supervisor Name |
|----|-----------------|-------------------|--------------------|-----------------|
| V1 | Angelica Romero | New Data Sheet | New Data Sheet | Jessica Lorenzo |