



**General Characteristics of Plenum Heater  
 7300 Series**

Is ETL-CETL listed.  
 The 7300 Series is a 20 gauge galvanized plenum duct heater.  
 The 7300 Series plenum heater is designed to fit jobs where the clear space between the ceiling and the floor is as small as 11-3/4 inches.  
 Is strictly for indoor use only.  
 For Industrial and Commercial use.  
 With a variable speed motor, factory set at maximum, the motor speed can be adjusted to increase its heat rise.  
 It is acoustically insulated with 1" fiberglass and has access panels on both sides of the cabinet.  
 It has both inlet and outlet screens, plus a duct connection.  
 The filter rack on inlet has throw away filters.  
 Is manufactured with 24 volt controls, disconnect switch, air flow switch and terminal blocks.  
 The 7300 Series has an automatic primary limit control and secondary fuse link.  
 Comes with single point connection and a dust tight control enclosure.  
 For proportionally regulated heat output the 7300 Series has optional wall thermostat, unit thermostat or SSR control.  
 Made in the U.S.A.



**Product Applications of Plenum Heater 7300 Series**

For industrial and commercial use or anywhere that might have a plenum, such as warehouses, factories, restaurants, offices, workshops or storage buildings ect.

**Warranty Industrial of Plenum Heater 7300 Series**

Manufacturer's Warranty: 1 year.



**Specific Characteristics of Plenum Heater 7300 Series**

Item #	Manufacturing #	KiloWatts KW	CFM Range	Volts/Phases V/Ph	Total Amperes for Motor & Heater	Stage	Motor Voltage V	Full Load Amps for Motor Only	Motor H.P.	Weight and Dimension with Packaging	
										Lbs.	L,W,H In
USFTH-001	F1G7305	5	170-950	208/1	26	1	208	2	1/4	165	49,34,13
USFTH-002	H1G7305	5	170-950	240/1	22	1	240	2	1/4	165	49,34,13
USFTH-003	G1G7305	5	170-950	277/1	20	1	277	2	1/4	165	49,34,13
USFTH-004	F3G7305	5	170-950	208/3	15	1	208	2	1/4	165	49,34,13
USFTH-005	H3G7305	5	170-950	240/3	14	1	240	2	1/4	165	49,34,13
USFTH-006	P3P7305	5	170-950	480/3	8	1	480	2	1/4	165	49,34,13
USFTH-007	F3E7310	10	170-950	208/3	32	1	208	4	1/4	165	49,34,13
USFTH-008	H3G7310	10	170-950	240/3	26	1	240	2	1/4	165	49,34,13
USFTH-009	P3P7310	10	170-950	480/3	14	1	480	2	1/4	165	49,34,13
USFTH-010	F3E7310-2	10	170-950	208/3	32	2	120	4	1/4	165	49,34,13
USFTH-011	H3G7310-2	10	170-950	240/3	26	2	240	2	1/4	165	49,34,13
USFTH-012	P3P7310-2	10	170-950	480/3	14	2	480	2	1/4	165	49,34,13
USFTH-013	H3G7312	12	270-1500	240/3	32	1	240	3	2X1/4*	224	49,51,13




Item #	Manufacturing #	KiloWatts KW	CFM Range	Volts/ Phases V/Ph	Total Amperes for Motor & Heater	Stage	Motor Voltage V	Full Load Amps for Motor Only	Motor H.P.	Weight and Dimension with Packaging	
										Lbs.	L,W,H In
USFTH-014	P3P7312	12	270-1500	480/3	17	1	480	3	2X1/4*	224	49,51,13
USFTH-015	F3E7312-2	12	270-1500	208/3	41	2	120	8	2X1/4*	224	49,51,13
USFTH-016	H3G7312-2	12	270-1500	240/3	32	2	240	3	2X1/4*	224	49,51,13
USFTH-017	P3P7312-2	12	270-1500	480/3	17	2	480	3	2X1/4*	224	49,51,13
USFTH-018	H3G7315	15	270-1500	240/3	39	1	240	3	2X1/4*	224	49,51,13
USFTH-019	P3P7315	15	270-1500	480/3	21	1	480	3	2X1/4*	224	49,51,13
USFTH-020	F3E7315-2	15	270-1500	208/3	49	2	120	8	2X1/4*	224	49,51,13
USFTH-021	H3G7315-2	15	270-1500	240/3	39	2	240	3	2X1/4*	224	49,51,13
USFTH-022	P3P7315-2	15	270-1500	480/3	21	2	480	3	2X1/4*	224	49,51,13
USFTH-023	P3P7318	18	270-1500	480/3	25	1	480	3	2X1/4*	224	49,51,13
USFTH-024	P3P7318-2	18	270-1500	480/3	25	2	480	3	2X1/4*	224	49,51,13

\* 2 Motors @ 1/4 HP Each

**Dimensions (in) of Plenum Heater 7300 Series**

Series	Length A	Width B	Height C
USFTH-001 to 012	47"	32"	11.75"
USFTH-013 to 024	47"	49"	11.75"

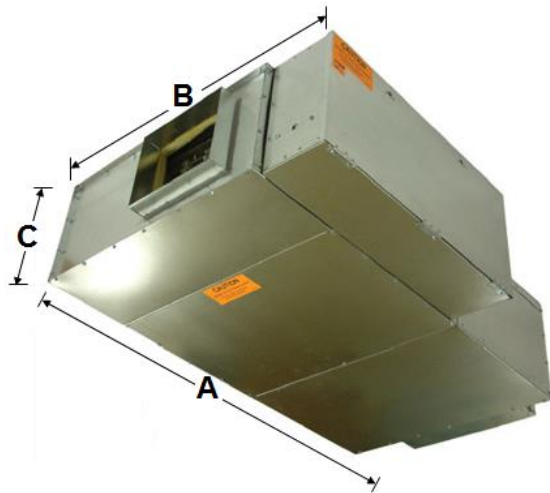

**Short Description of Plenum Heater 7300 Series**

VentDepot Item #	Manufacturing #	Short Description 70 Characters Maximum
------------------	-----------------	---

USFTH-001	F1G7305	5Kw, 170-950CFM, 208/1 V/Ph, Total A- 26A, Motor V/HP- 208 1/4, 2A Full Load A, Stage1.
-----------	---------	---



<b>SEO Table of Plenum Heater 7300 Series</b>	
<b>Title</b>	
TPI Plenum Heater 7300 Series.	
<b>Meta Description</b>	
TPI Plenum Heater 7300 Series for Commercial Use, TPI Plenum Heater 7300 Series for Industrial Use, TPI Plenum Heater 7300 Series for Indoor Use, TPI Plenum Heater 7300 Series for Plenum.	
<b>Meta Key Words</b>	
TPI Plenum Heater 7300 Series for Commercial Use, TPI Plenum Heater 7300 Series for Industrial Use, TPI Plenum Heater 7300 Series for Indoor Use, TPI Plenum Heater 7300 Series for Plenum.	
<b>Meta URL (file name)</b>	
tpi-plenum-duct-heater-7300-series-us-english.htm	

<b>Product Line Description of Plenum Heater 7300 Series</b>
<pre> &lt;FONT Size=1&gt; &lt;b&gt;Product Description:&lt;/b&gt; TPI Plenum Duct Heater&lt;br&gt; &lt;b&gt;Weather Rating:&lt;/b&gt; Indoor&lt;br&gt; &lt;b&gt;Kilowatts:&lt;/b&gt; 5,10,12,15 or 18Kw&lt;br&gt; &lt;b&gt;CFM:&lt;/b&gt; 170-950 to 277-1500&lt;br&gt; &lt;b&gt;Voltage:&lt;/b&gt; 208,240,277 or 480V&lt;br&gt; &lt;b&gt;Phases:&lt;/b&gt; 1 or 3Ph&lt;br&gt; &lt;b&gt;Total Amperes for Motor &amp; Heater:&lt;/b&gt; 8 to 49A&lt;br&gt; &lt;b&gt;Stage:&lt;/b&gt; 1 or 2&lt;br&gt; &lt;b&gt;Motor Volts:&lt;/b&gt; 120, 208, 240, 277 or 480V&lt;br&gt; &lt;b&gt;Full Load Amperes Motor Only:&lt;/b&gt; 2,3,4 or 8A&lt;br&gt; &lt;b&gt;Motor H.P.:&lt;/b&gt; 1/4 and 2 Motors 1/4 H.P. Each&lt;br&gt; &lt;b&gt;Product Type:&lt;/b&gt; Industrial/Electrical TPI Heaters&lt;br&gt; &lt;b&gt;Usual Delivery Time or Lead Time:&lt;/b&gt; 1 to 2 weeks&lt;br&gt; &lt;/FONT&gt;                     </pre>