



SBX-D Series

Industrial Direct Drive Suspension Blowers

Data Sheet

General Characteristics of SBX-D Series Industrial Direct Drive Suspension Blowers.

- On-Off rocker switch
- SJT type 3 conductor, 12' long cord.
- Aluminum Blade.
- Powder coated spiral wire front and rear guards.
- Corrosion and dent proof high density polyethylene housing.
- Meets OSHA standards.
- 1 year limited warranty.
- Mounting chain not included.
- Made in U.S.A.
- Motor Specifications
- 120V, 1-Phase
- Ball bearing
- Permanent split capacitor
- 2-Speed on 30" & 36" model
- 1-Speed on 42" model
- Permanently lubricated



Product Applications of SBX-D Series Industrial Direct Drive Suspension Blowers.

For industrial and commercial use.
 Used for cooling factories, shops, bakeries, loading docks, laundries, gymnasiums, warehouses, aircraft hangars, and virtually any place a high volumen of air movement is required.
 For indoor use.

Warranty of SBX-D Series Industrial Direct Drive Suspension Blowers.

Manufacturer's Warranty: 1 year.

Specific Characteristics of SBX-D Series Industrial Direct Drive Suspension Blowers.

Item #	Manufacturing #	Size Ø(in)	CFM		Volts V	Amperes A	Phases PH	HP	RPM	Motor Type	Weight and Dimensions with Packaging	
			High	Low							Lbs.	L,W,H In.
USSBH-001	SBX30-D	30	4400	3800	120	2.7	1	¼	1050	ODP Open	60	21,42,42
USSBH-002	SBX36-D	36	6500	5400	120	5.5	1	⅓	1050	ODP Open	72	21,48,48
USSBH-003	SBX42-D	42		9000	120	7.9	1	½	825	ODP Open	101	21,54,54







SBX-D Series

Industrial Direct Drive Suspension Blowers

Data Sheet

Dimensions (In.) of SBX-D Series Industrial Direct Drive Suspension Blowers

Series	Length A	Width B	Height C
USSBH-001	30.3"	30.3"	18"
USSBH-002	36.3"	36.3"	21"
USSBH-003	42.5"	42.5"	21"

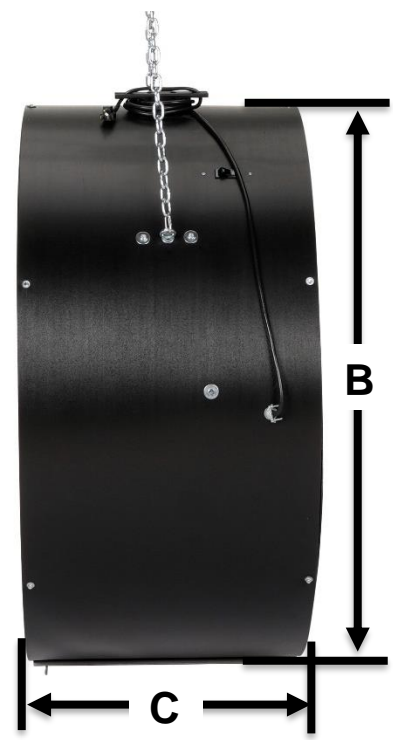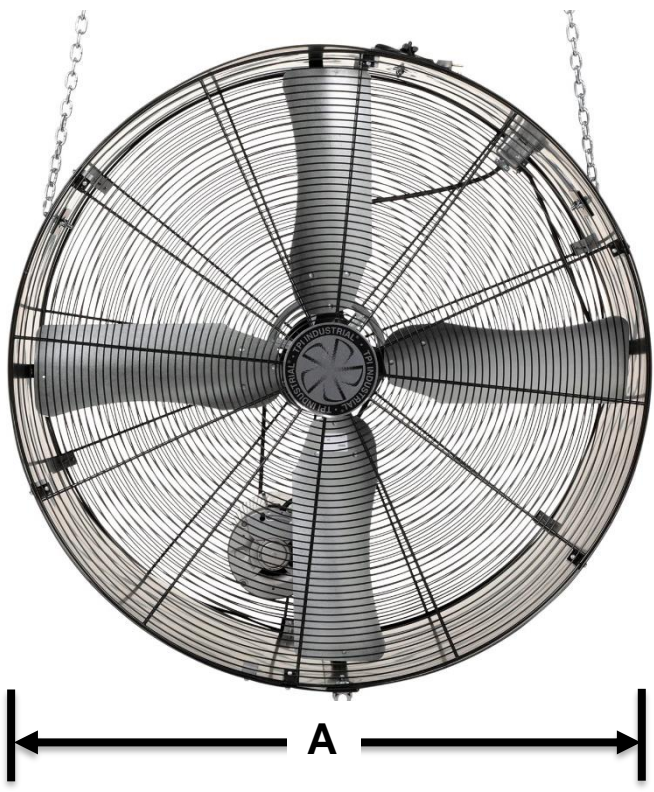




SBX-D Series

Industrial Direct Drive Suspension Blowers

Data Sheet

Gallery of SBX-D Series Industrial Direct Drive Suspension Blowers

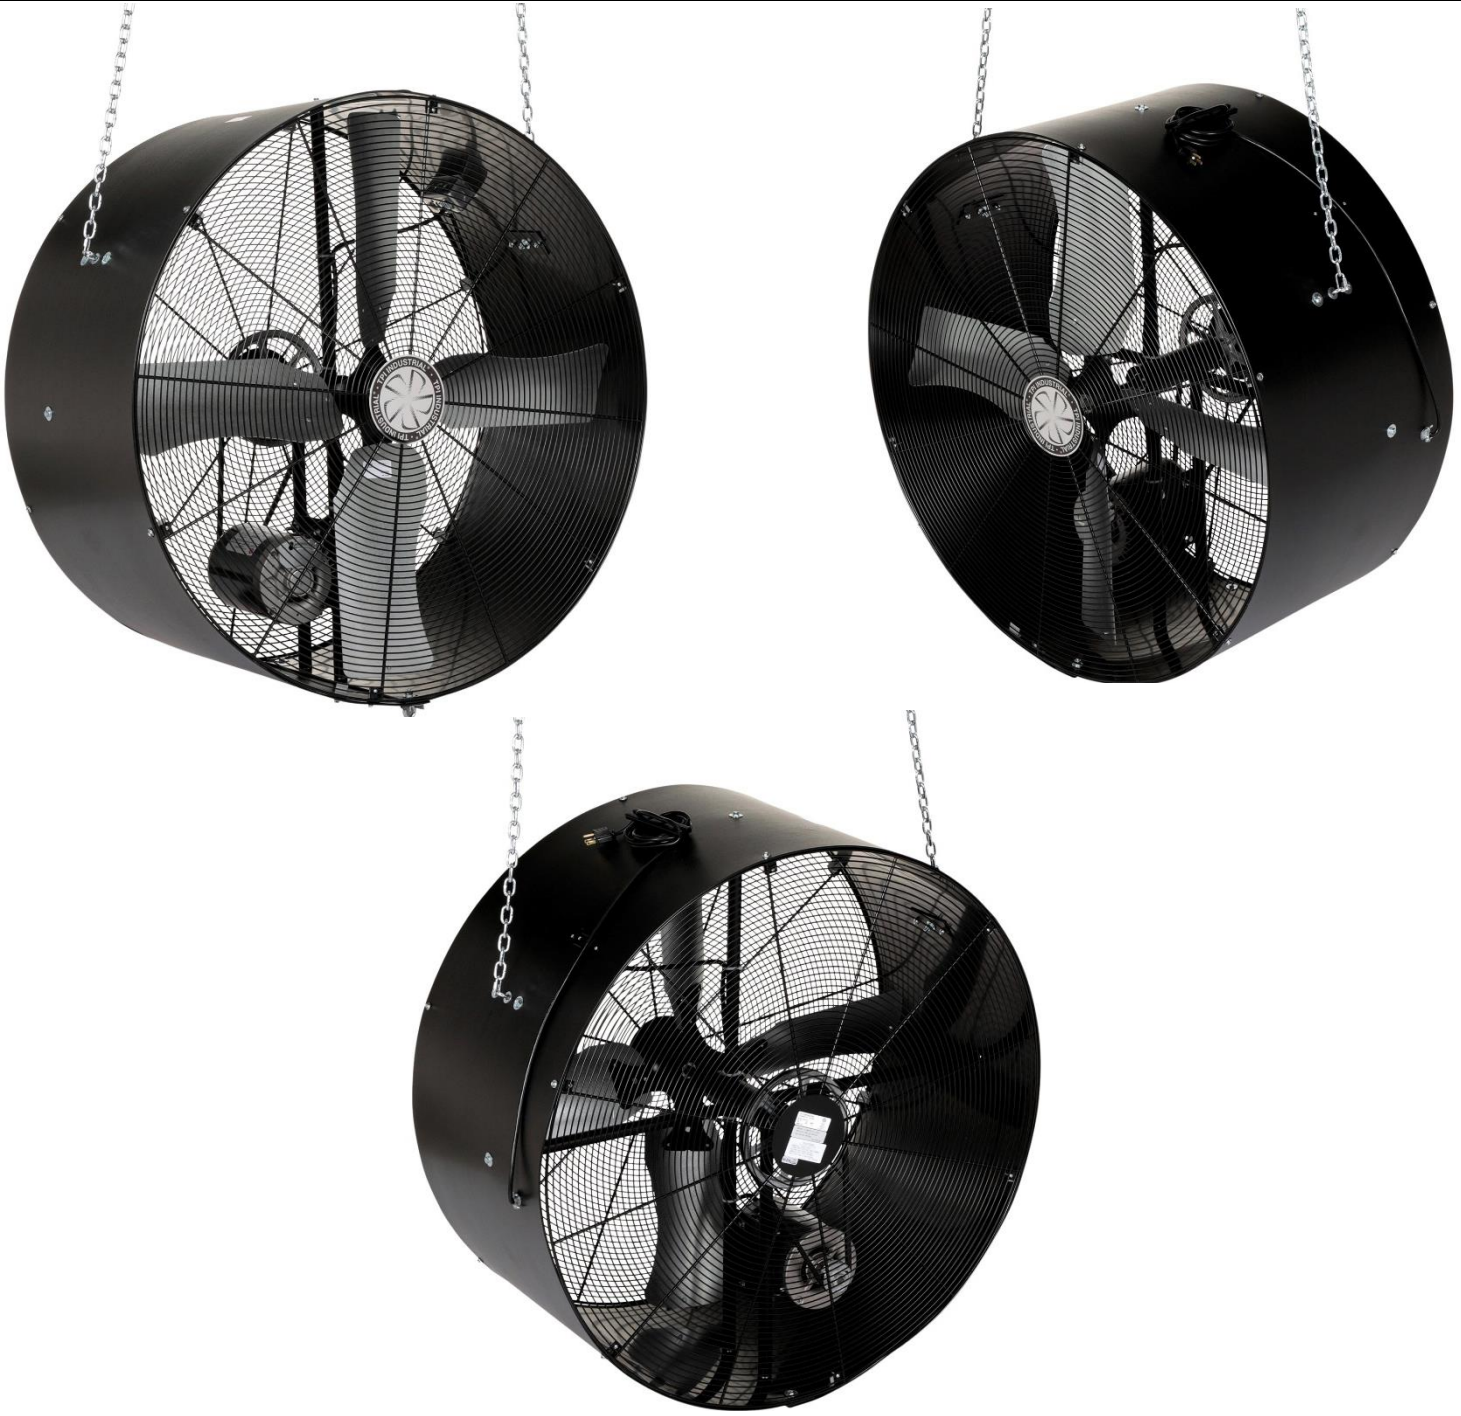

ID	Author	Description Error	Description Update	Supervisor Name
V1	Marcela Roldán	New Tab	New Tab	Jessica Lorenzo

